


Central Article Code: D23058C29-A

Local Code: EA654

Created: 24/02/2020

Modified: 18/12/2020

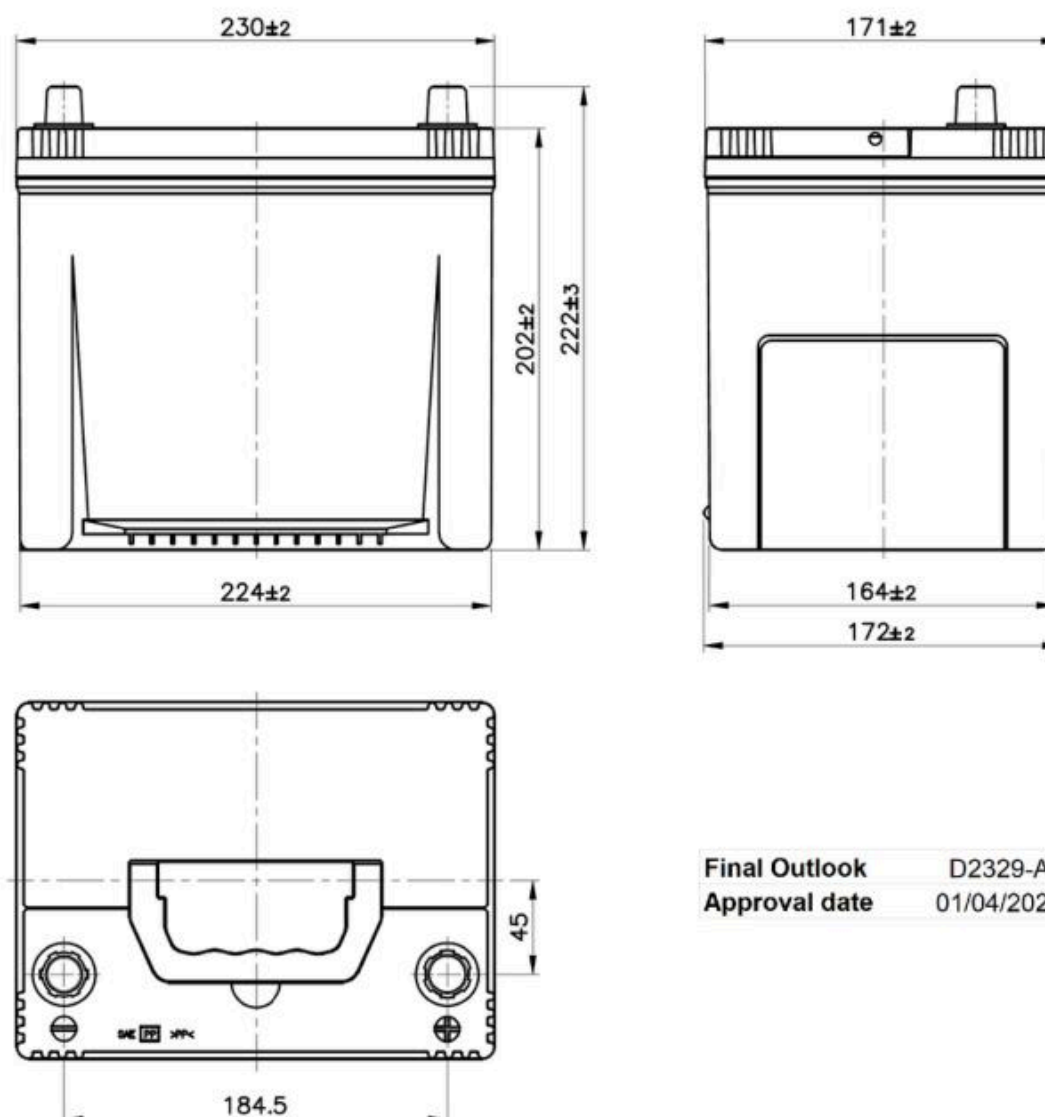

Final Outlook	D2329-A
Approval date	01/04/2021

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	65.0 20 h
Cranking (A):	580 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)

STD. DIMENSIONS

Length (mm ± 2):	230
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	16.80

CONTAINER

Type:	D23	BLACK
Hold Down:	Korean B1	
H.D. Adapter:	No	

COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	No	

PLUGS

Type:	1 x Vent Sealed (JIS)	BLACK
-------	-----------------------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

C.O. from D23058C05-A (Grey to Black)