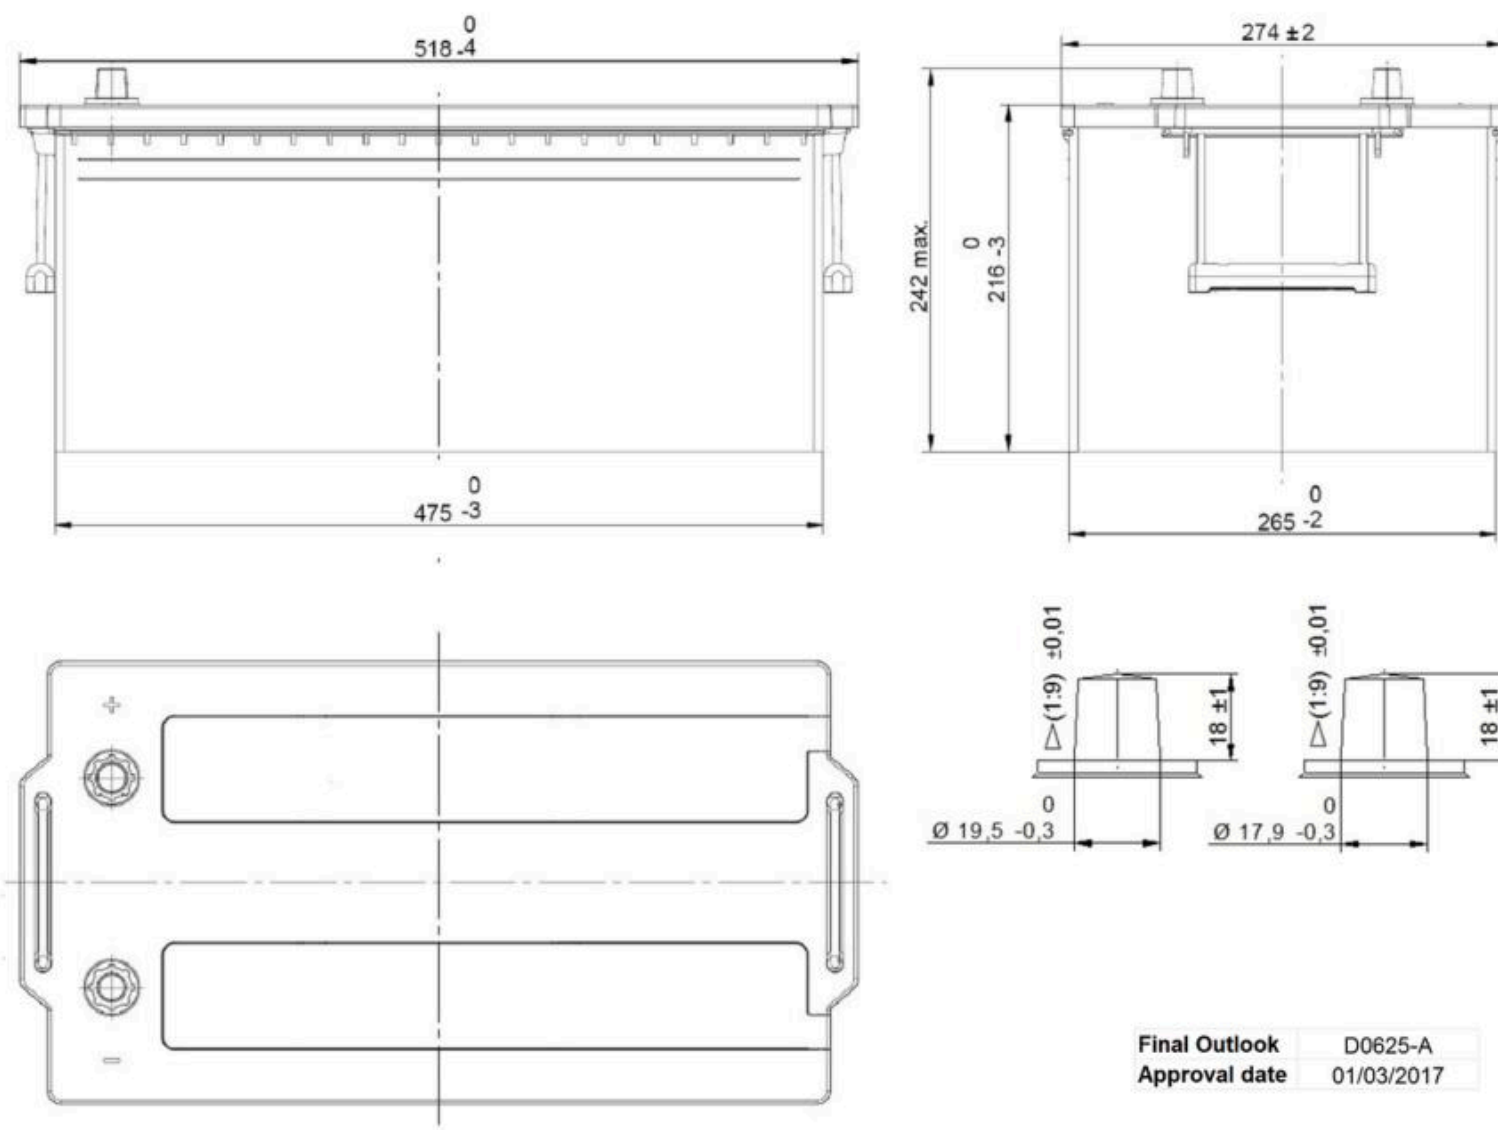


Central Article Code: D06119C25-A

Created: 29/07/2016

Local Code: EE2353

Modified: 29/07/2016


Final Outlook D0625-A
Approval date 01/03/2017

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	235.0 20 h
Cranking (A):	1200 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V4 (3 axis) ref. EN-2015
Endurance:	E2 (150c@50%) ref. EN-2015

STD. DIMENSIONS

Length (mm ± 2):	518
Width (mm ± 2):	279
Height (mm ± 2):	240
Total Weight (kg ± 5%):	56.80

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	D06	GREY MEDIUM
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press	GREY MEDIUM
Polarity:	ETN 3	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	1 Filter per Vent	
Lateral Plug:	No	

PLUGS

Type:	2 x VCL Vent	GREY MEDIUM
-------	--------------	-------------

HANDLES

Type:	2 x Rope (Rigid holde	BLACK
-------	-----------------------	-------

OTHERS

Degassing Tube:	No
-----------------	----