


Central Article Code: D06120A16-A

Created: 08/06/2010

Local Code: EP2100

Modified: 23/07/2018

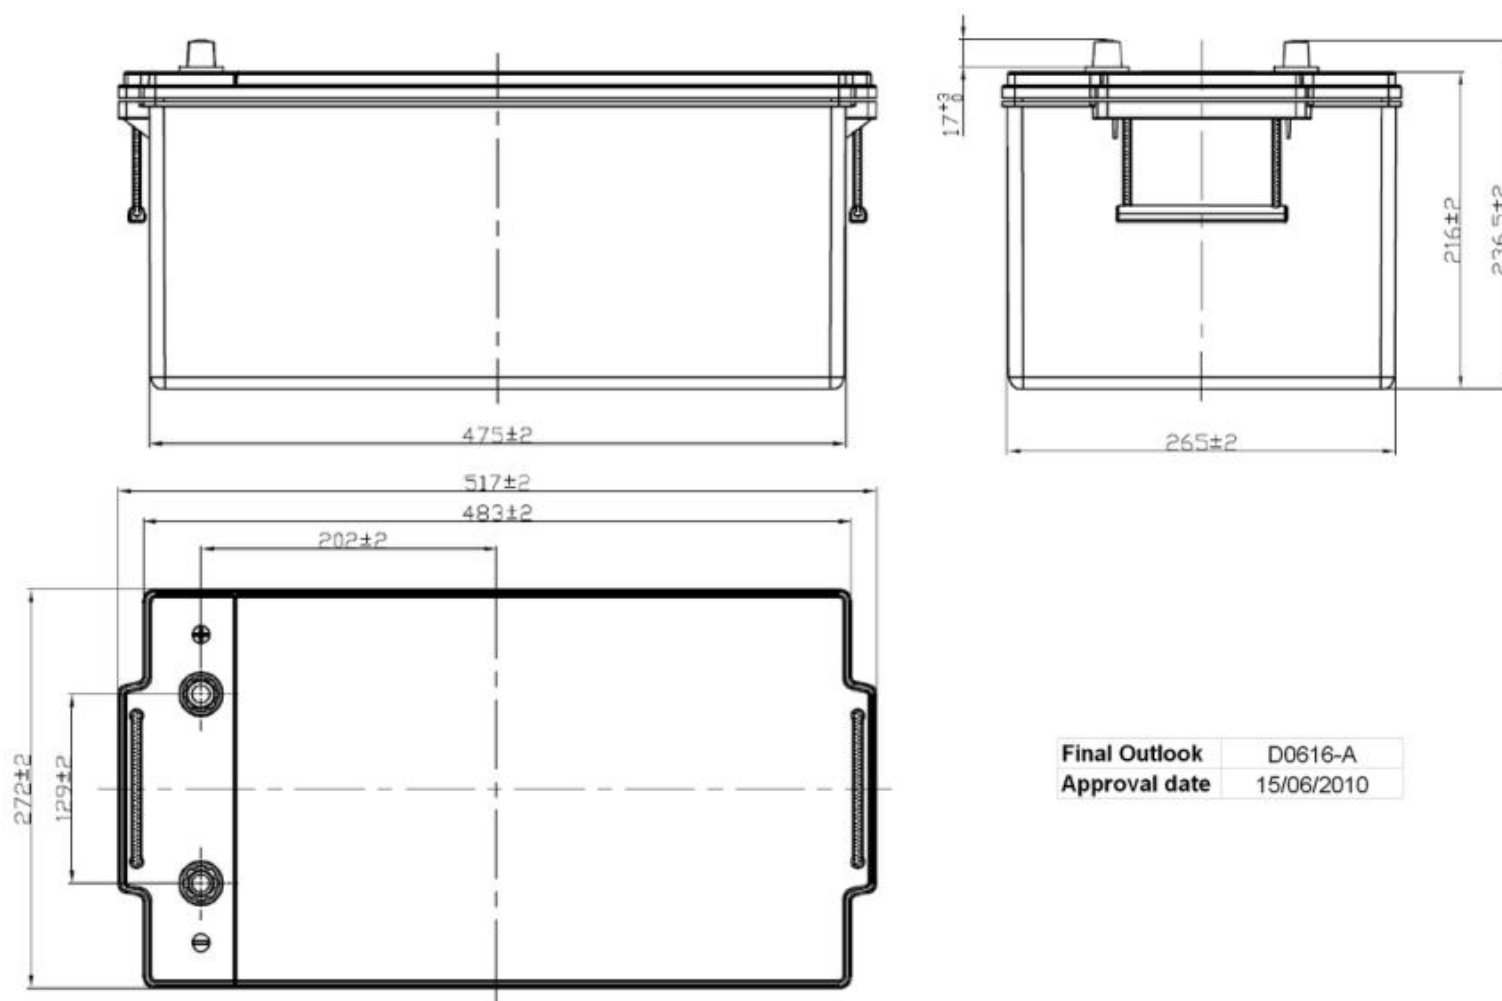

Final Outlook	D0616-A
Approval date	15/06/2010

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	240.0 20 h
Cranking (A):	1200 EN
Charge:	CHARGED
Technology:	AGM
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	300 cycles@75%

STD. DIMENSIONS

Length (mm ± 2):	518
Width (mm ± 2):	274
Height (mm ± 2):	240
Total Weight (kg ± 5%):	70.00

CONTAINER

Type:	D06	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Double without Hand	BLUE LIGHT
Polarity:	ETN 3	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	1 Filter	
Lateral Plug:	No	

PLUGS

Type:	1 x Valve+Cover	BLUE LIGHT
-------	-----------------	------------

HANDLES

Type:	2 x Rope (Rigid holder)	BLACK
-------	-------------------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

DNV-GL type approved 2015