


Central Article Code: D31065W22-A

Created: 14/06/2010

Local Code: ER450

Modified: 31/07/2020

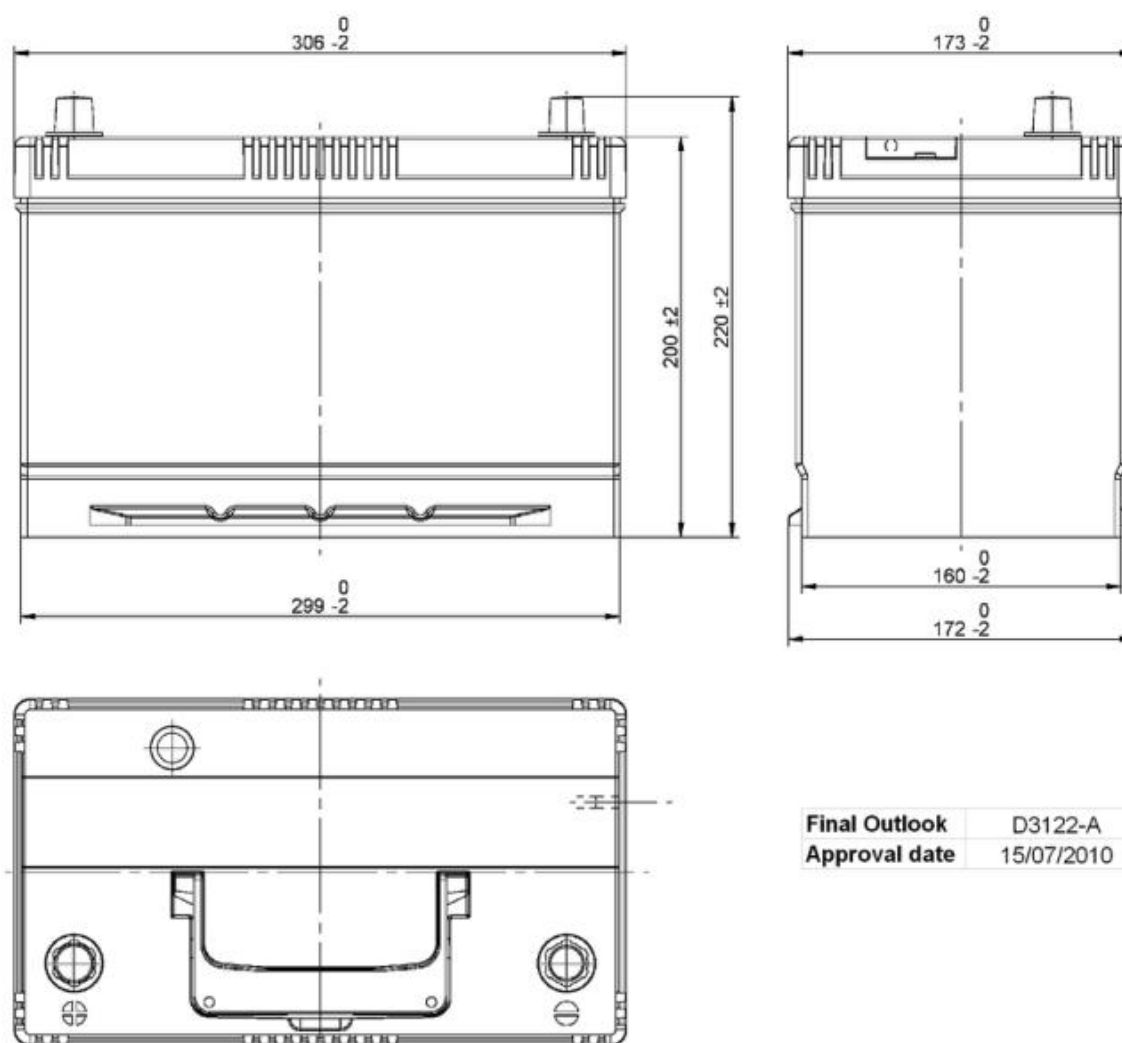

Final Outlook	D3122-A
Approval date	15/07/2010

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	95.0 20 h
Cranking (A):	650 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Hybrid
Vibration:	V2 (30Hz+/-2Hz/6g/2h)
Endurance:	300 cycles@40%

STD. DIMENSIONS

Length (mm ± 2):	306
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	21.70

CONTAINER

Type:	D31 BLACK
Hold Down:	Korean B1
H.D. Adapter:	No

COVER

Type:	Flat/Press integrated BLUE LIGHT
Polarity:	ETN 1
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	Black SOCI with one ball
Ventilation:	Central
Filter:	1 Filter at Right
Lateral Plug:	No

PLUGS

Type:	1 x VCL Vent BLUE LIGHT
-------	------------------------------

HANDLES

Type:	1 x Integrated BLACK
-------	---------------------------

OTHERS

Degassing Tube:	Elbow+Tube+Valve
-----------------	------------------

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

Tested acc. BCIS-08 Rev. Dec02