
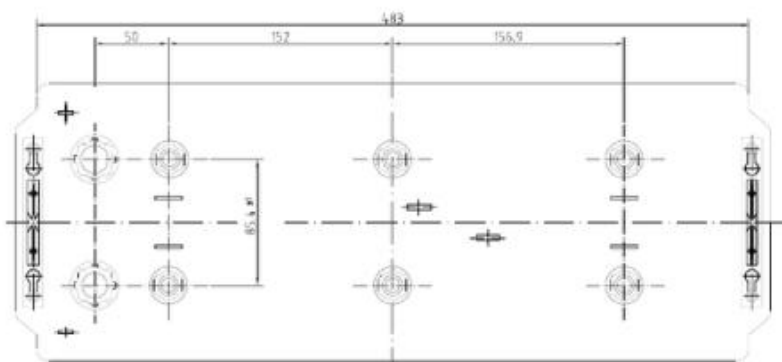
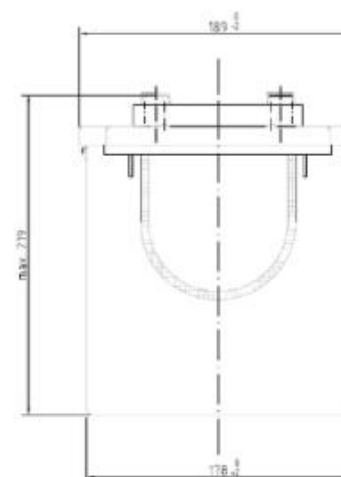


Central Article Code: D04076G09-A

Local Code: ES1350

Created: 05/09/2005

Modified: 20/07/2023

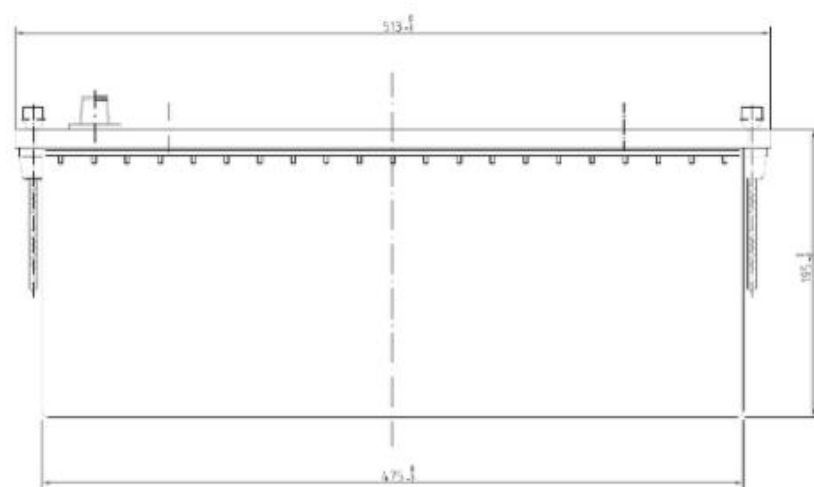

|               |            |
|---------------|------------|
| Final Outlook | D0409-A    |
| Approval date | 01/11/2010 |

## PERFORMANCES

|               |                        |
|---------------|------------------------|
| Voltage (V):  | 12 V                   |
| C20 (Ah):     | 120.0      20 h        |
| Cranking (A): | 0      EN              |
| Charge:       | CHARGED                |
| Technology:   | GEL                    |
| Grid:         | Ca/Ca                  |
| Vibration:    | V3 (30Hz+/-2Hz/6g/20h) |
| Endurance:    | 200 cycles@100%        |

## STD. DIMENSIONS

|                         |       |
|-------------------------|-------|
| Length (mm ± 2):        | 513   |
| Width (mm ± 2):         | 189   |
| Height (mm ± 2):        | 223   |
| Total Weight (kg ± 5%): | 40.00 |

## CONTAINER

|               |     |       |
|---------------|-----|-------|
| Type:         | D04 | BLACK |
| Hold Down:    | B0  |       |
| H.D. Adapter: | No  |       |

## COVER

|                   |               |       |
|-------------------|---------------|-------|
| Type:             | Flat/Screw    | BLACK |
| Polarity:         | ETN 3         |       |
| Terminals:        | EN taper post |       |
| Terminal Adapter: | No            |       |
| SOCI:             | No            |       |
| Ventilation:      | Independent   |       |
| Filter:           | No            |       |
| Lateral Plug:     | No            |       |

## PLUGS

|       |               |             |
|-------|---------------|-------------|
| Type: | 6 x M18 Valve | GREY MEDIUM |
|-------|---------------|-------------|

## HANDLES

|       |                         |       |
|-------|-------------------------|-------|
| Type: | 2 x Rope (Rigid holder) | BLACK |
|-------|-------------------------|-------|

## OTHERS

|                 |    |
|-----------------|----|
| Degassing Tube: | No |
| Gel             |    |

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

DNV-GL type approved 2015/Used for Bosch