


Central Article Code: L05054G30-A

Created: 12/09/2005

Local Code: ES900

Modified: 20/07/2023

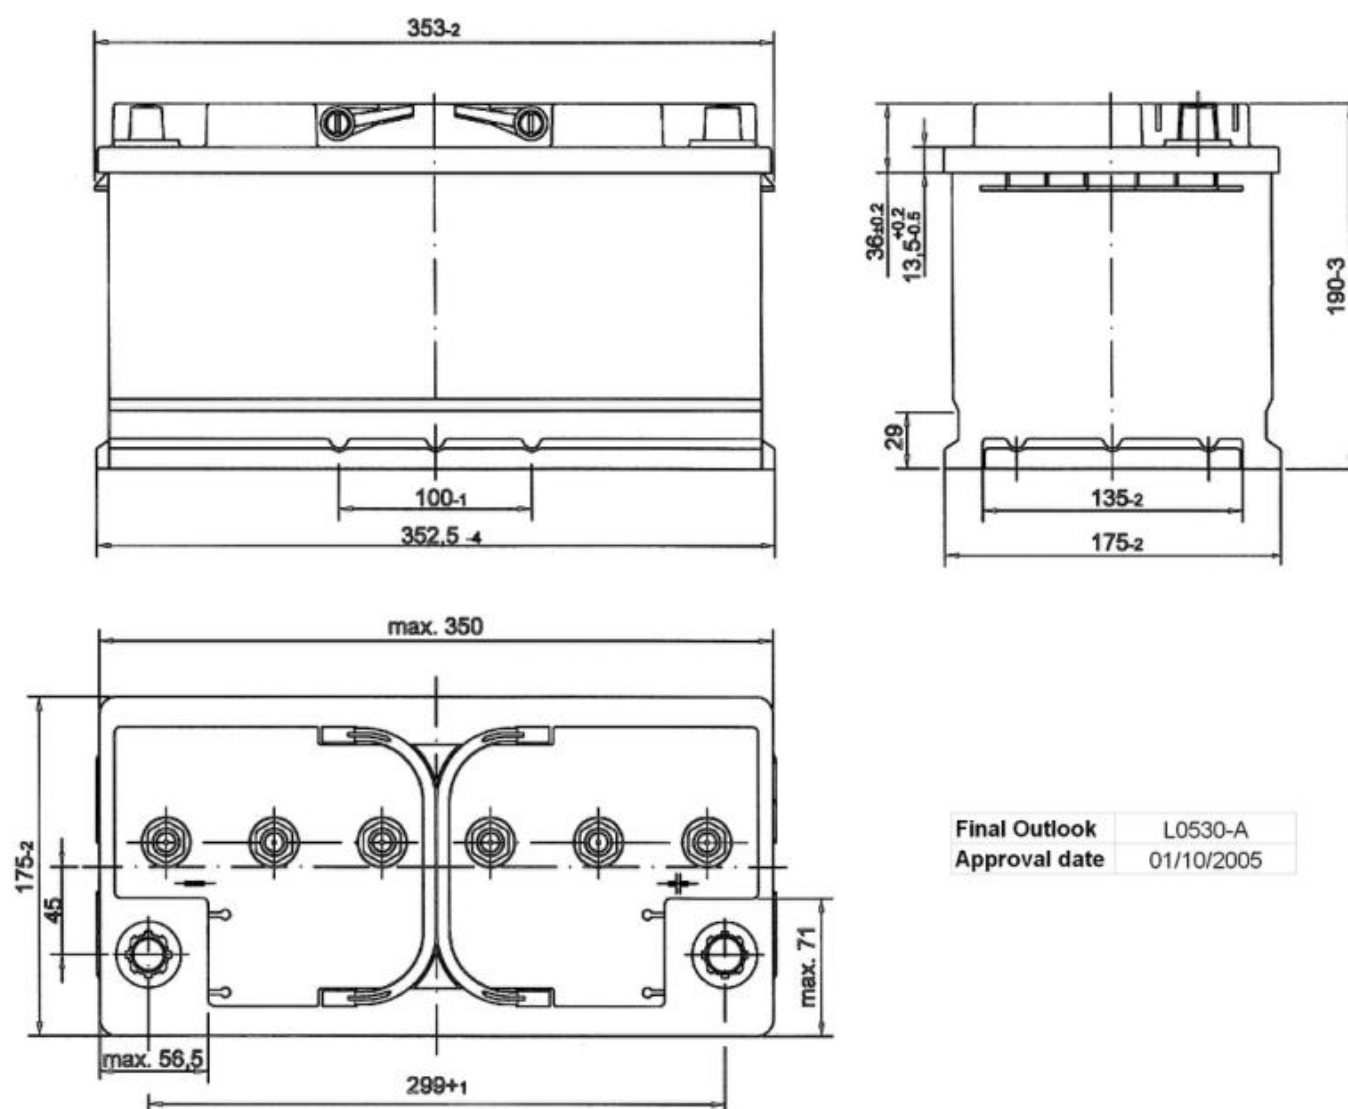

Final Outlook	L0530-A
Approval date	01/10/2005

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	80.0 20 h
Cranking (A):	0 EN
Charge:	CHARGED
Technology:	GEL
Grid:	Ca/Ca
Vibration:	V3 (30Hz $\pm$ 2Hz/6g/20h)
Endurance:	300 cycles@100%

STD. DIMENSIONS

Length (mm $\pm$ 2):	353
Width (mm $\pm$ 2):	175
Height (mm $\pm$ 2):	190
Total Weight (kg $\pm$ 5%):	25.50

CONTAINER

Type:	L05	BLACK
Hold Down:	B13	
H.D. Adapter:	No	

COVER

Type:	DIN	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

PLUGS

Type:	6 x M18 Valve	GREY MEDIUM
-------	---------------	-------------

HANDLES

Type:	2 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

DNV-GL type approved 2015/Used for Bosch