


Central Article Code: D31080C43-A

Created: 24/02/2020

Local Code: EA955

Modified: 10/01/2023

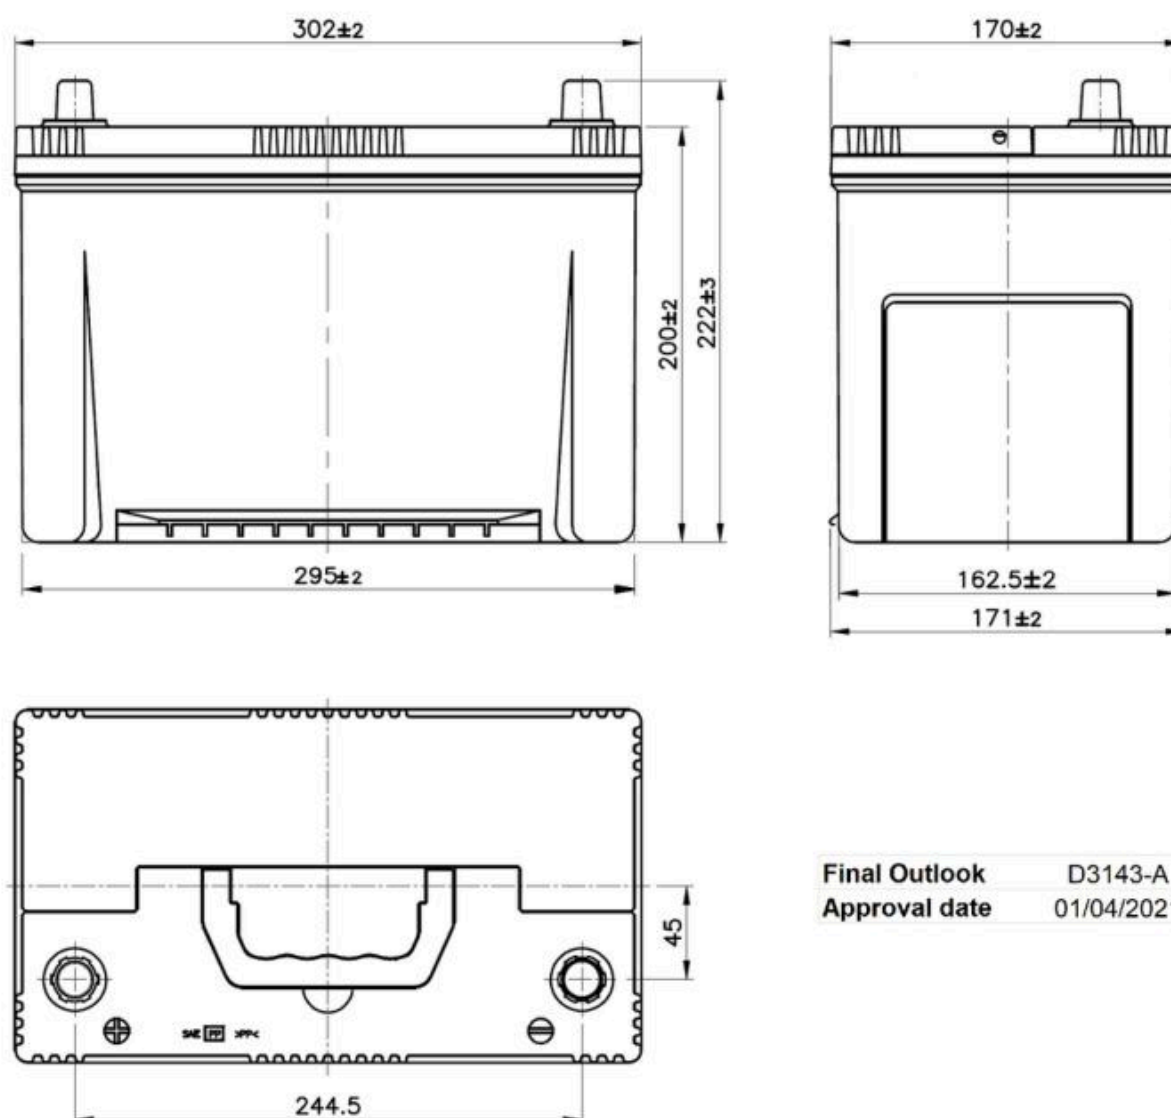

Final Outlook D3143-A
Approval date 01/04/2021

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	95.0 20 h
Cranking (A):	800 EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E1 (180 cycles@25%)

STD. DIMENSIONS

Length (mm ± 2):	306
Width (mm ± 2):	173
Height (mm ± 2):	222
Total Weight (kg ± 5%):	21.40

CONTAINER

Type:	D31 BLACK
Hold Down:	Korean B1
H.D. Adapter:	No

COVER

Type:	Double with Integrat BLACK
Polarity:	ETN 1
Terminals:	EN taper post
Terminal Adapter:	No
SOCI:	No
Ventilation:	Central
Filter:	2 Filters
Lateral Plug:	No

PLUGS

Type:	1 x Vent Sealed (JIS) BLACK
-------	-----------------------------

HANDLES

Type:	1 x Integrated BLACK
-------	----------------------

OTHERS

Degassing Tube:	No
-----------------	----

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

C.O. from D31080C12-A (Grey to Black)