


Central Article Code: L02070A69-F

Created: 31/01/2022

Local Code: EP500

Modified: 21/09/2022

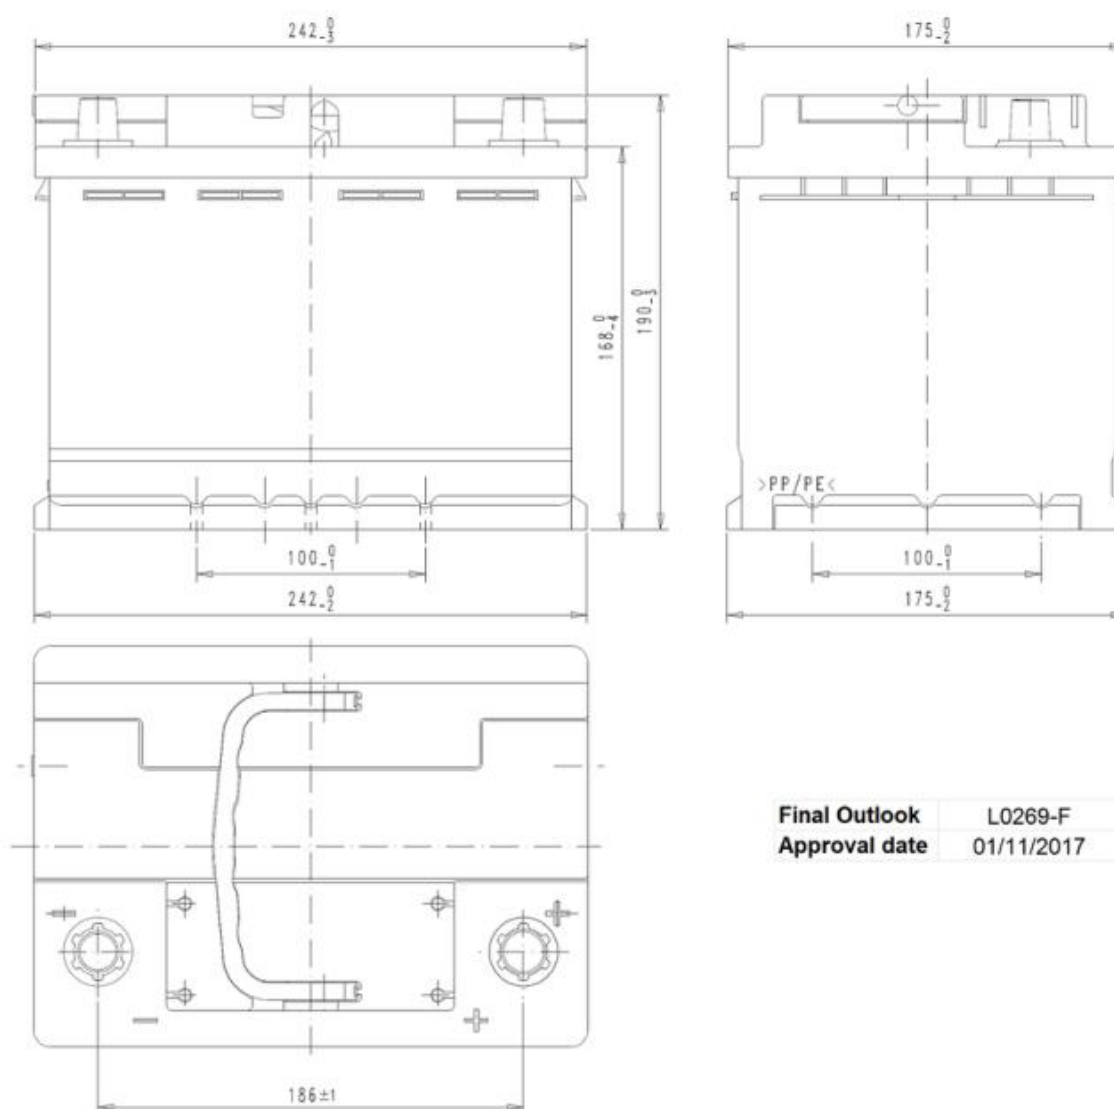

Final Outlook L0269-F
Approval date 01/11/2017

PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	62.0 20 h
Cranking (A):	680 EN
Charge:	CHARGED
Technology:	AGM
Grid:	Ca/Ca
Vibration:	Manufactured Specific
Endurance:	E4 EN50342-6

STD. DIMENSIONS

Length (mm ± 2):	242
Width (mm ± 2):	175
Height (mm ± 2):	190
Total Weight (kg ± 5%):	17.90

CONTAINER

Type:	L02	BLACK
Hold Down:	B13	
H.D. Adapter:	No	

COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	Standard	Left side BLACK shape

PLUGS

Type:	1 x Vent Sealed (Valve)	BLACK
-------	-------------------------	-------

HANDLES

Type:	1 x Integrated	BLACK
-------	----------------	-------

OTHERS

Degassing Tube:	No
-----------------	----

DNV-GL type approved 2015

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.